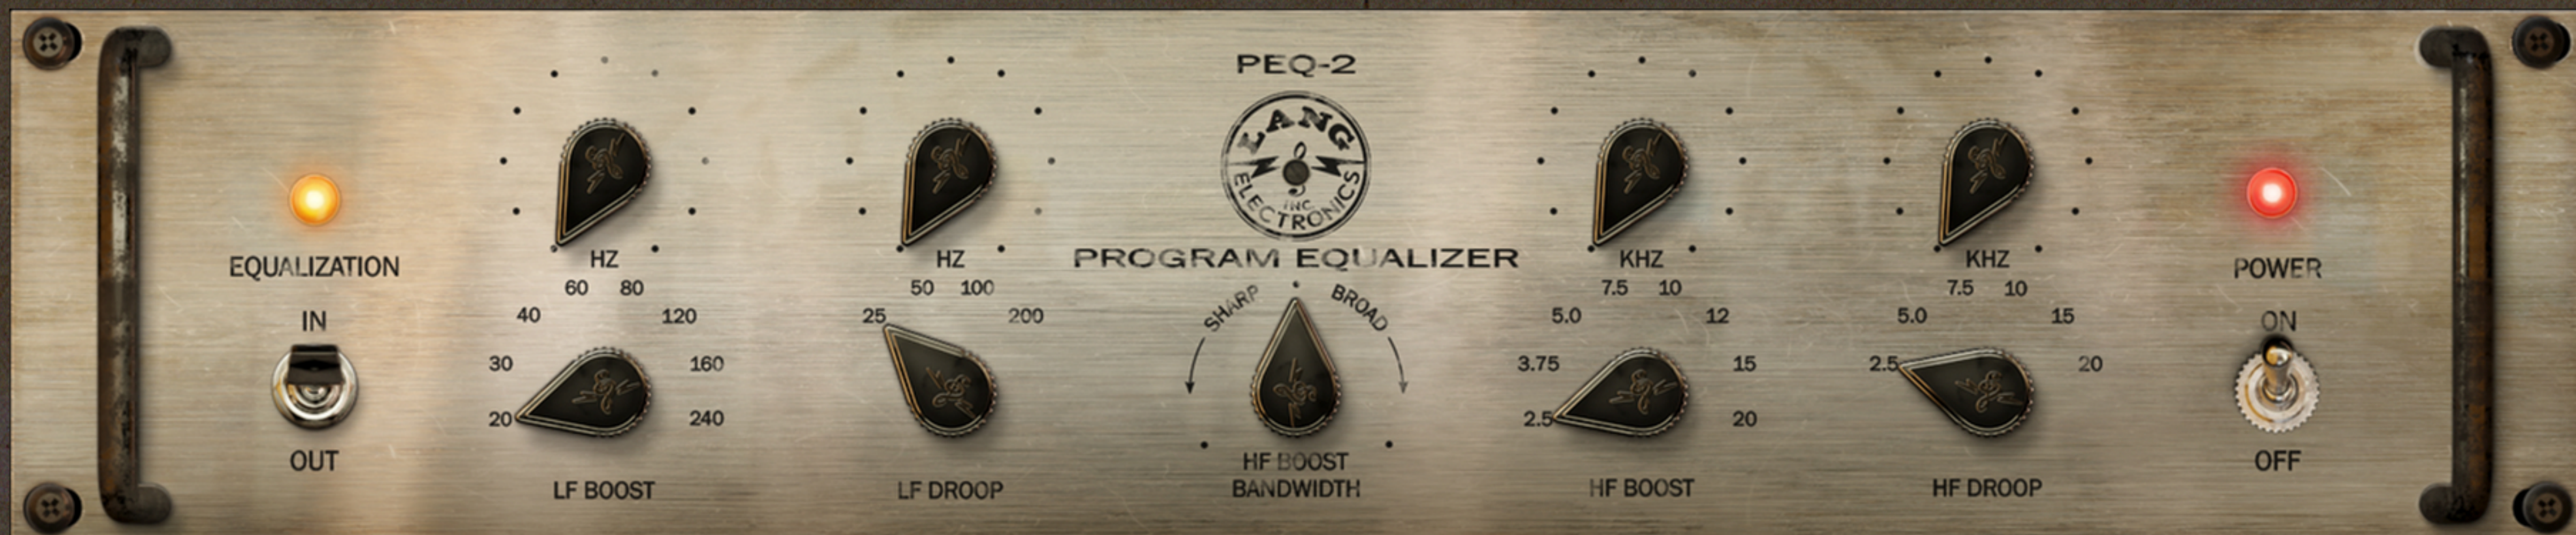# PLUGIN
USER MANUAL

THE LANG PEQ-2 HAS BEEN A POWERFUL SECRET WEAPON FOR MANY DURING THE LAST 60 YEARS AND IS NOW FINALLY AVAILABLE TO EVERYBODY!

The Lang PEQ-2 Program Equalizer was almost lost in time before Heritage Audio bought and relaunched the brand in 2022. Not very many units were made and those that have survived until today are carefully guarded by their lucky owners.

Also known as the "Transistors Pultec" as both units are based on the same patented Western Electric design, those that are lucky enough to still have them have stated that they have become their "secret weapon".

AT LAST, A LANG PEQ-2 PLUGIN THAT DOES JUSTICE TO THE HARDWARE UNITS

So, once again, Heritage Audio is on the scene to make this nearly lost treasure available to any and all. After successfully recreating the legendary outboard unit back in 2022, we believe we are the only ones entitled to take the next step and faithfully represent the unit's uniqueness into a plugin that really does justice to the original...something that hasnt being the case up until today.

After months of careful modelling, the LANG PEQ-2 is now available for purchase in native form so grab one while you can...you will not regret it!

CONTROLS

Indicates the EQ stage of the PEQ-2 is in "ON" when lit.

ORANGE EQ LED

0 to 16 dB.

**GAIN KNOB
LF BOOST**

0 to 18 dB.

**GAIN KNOB
LF DROOP**

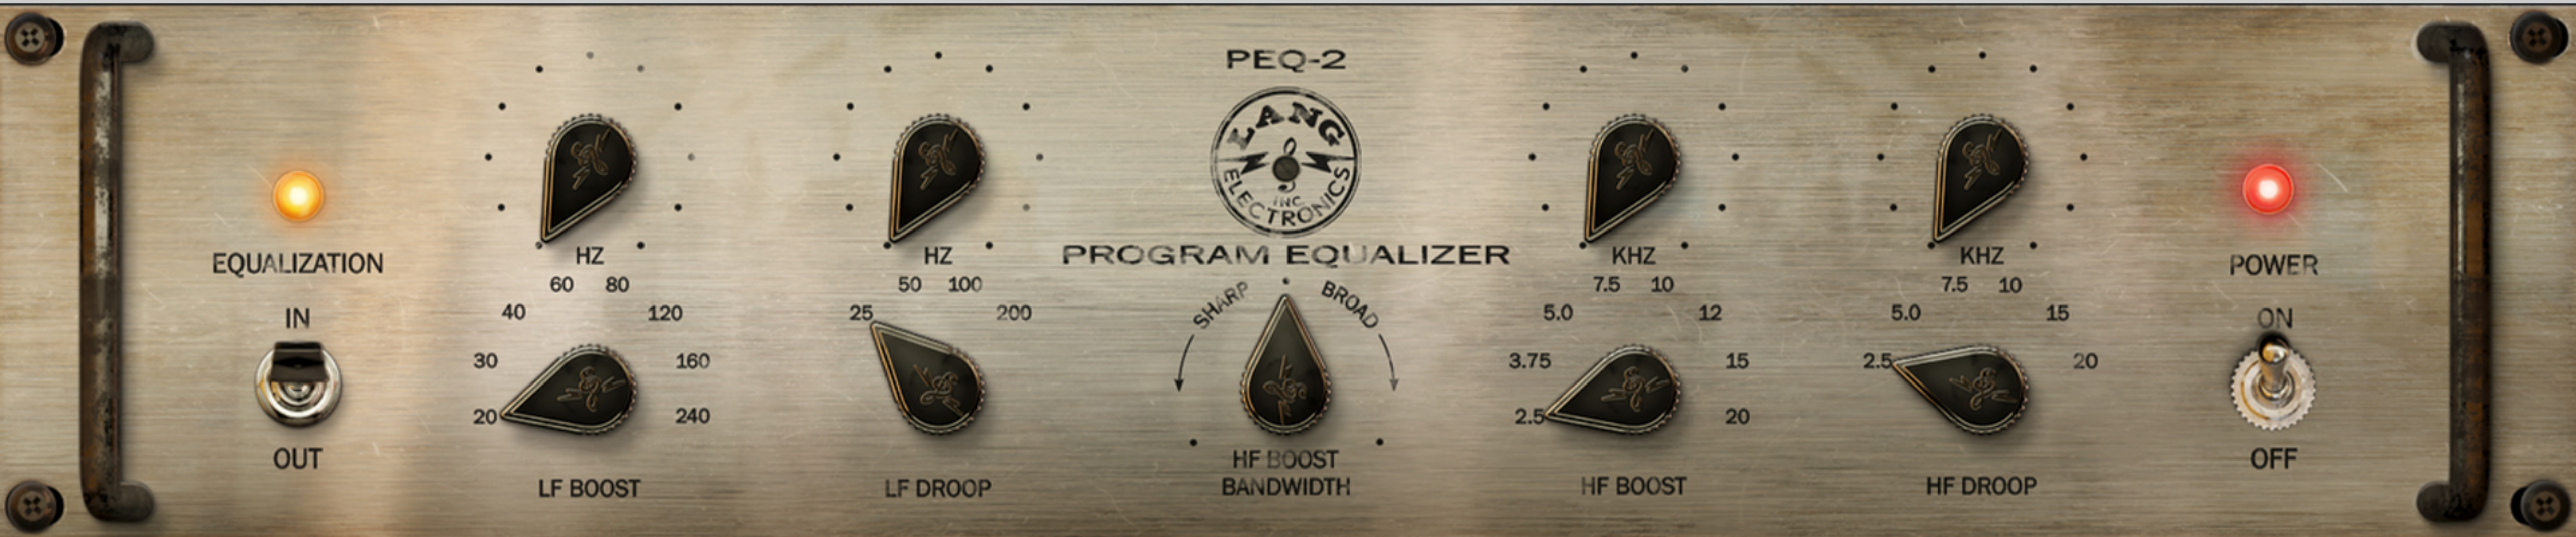21 to 12.5 dB depending on the BANDWIDTH setting

**GAIN KNOB
HF BOOST**

0 to 16 dB.

**GAIN KNOB
HF DROOP**

Indicates equipment in "ON"

RED LIGHT

**EQUALIZATION
SWITCH**

Switches the EQ stage of the PEQ-2 IN and OUT.

LF BOOST

20 Hz; 30 Hz; 40 Hz; 60 Hz; 80 Hz; 120 Hz; 160 Hz; 240 Hz.

LF DROOP

25 Hz; 50 Hz; 100 Hz; 200 Hz.

**HF BOOST
BANDWIDTH**

Varies the EQ curve between SHARP and BROAD for the HF BOOST.

HF BOOST

2.5 kHz; 3.75 kHz; 5.0 kHz; 7.5 kHz; 10 kHz; 12 kHz; 15 kHz; 20 kHz.

HF DROOP

2.5 kHz; 5.0 kHz; 7.5 kHz; 10 kHz; 15 kHz; 20 kHz.

POWER SWITCH

Turns the unit ON or OFF

COMPATIBILITY:

- Plugin formats: VST3, AU, AAX (64-bit).
- Platforms supported: Mac OS 10.15.7 and up (Both INTEL and Native Apple Silicon M1/M2/M3 Compatibility). PC Windows 10 and 11.
- DAWs supported: All major DAWs, including Ableton Live, Pro Tools, Logic Pro, FL Studio, Cubase, Studio One, Bitwig, Reaper, Reason etc.

INSTALLATION:

A software download is made available in your Downloads section of your profile in https://users.heritageaudio.com right after your purchase.

Select either Mac or PC depending on your system.

- MAC: Double click on the PKG installer and follow the instructions.
- PC/WINDOWS: Double click on the setup .exe file and follow the instructions.

ACTIVATION AND TRIAL PERIOD:

If you have purchased your LANG PEQ-2 through https://users.heritageaudio.com, an iLok licence will have been deposited on your iLok account as soon as you have finished your purchase. Your copy of the BritStrip will be automatically activated upon opening the plugin for the first time while logged into your iLok account.
If you have purchased your BritStrip through a third party vendor, an activation code will have been emailed to you once the purchase is completed. Enter the activation code provided when iLok ask for it the first time you open it.

If you have any problems activating, please email users@heritageaudio.com

If you're running your LANG PEQ-2 in trial mode, please note that the trial will be fully functional for 14 days after its first validation.
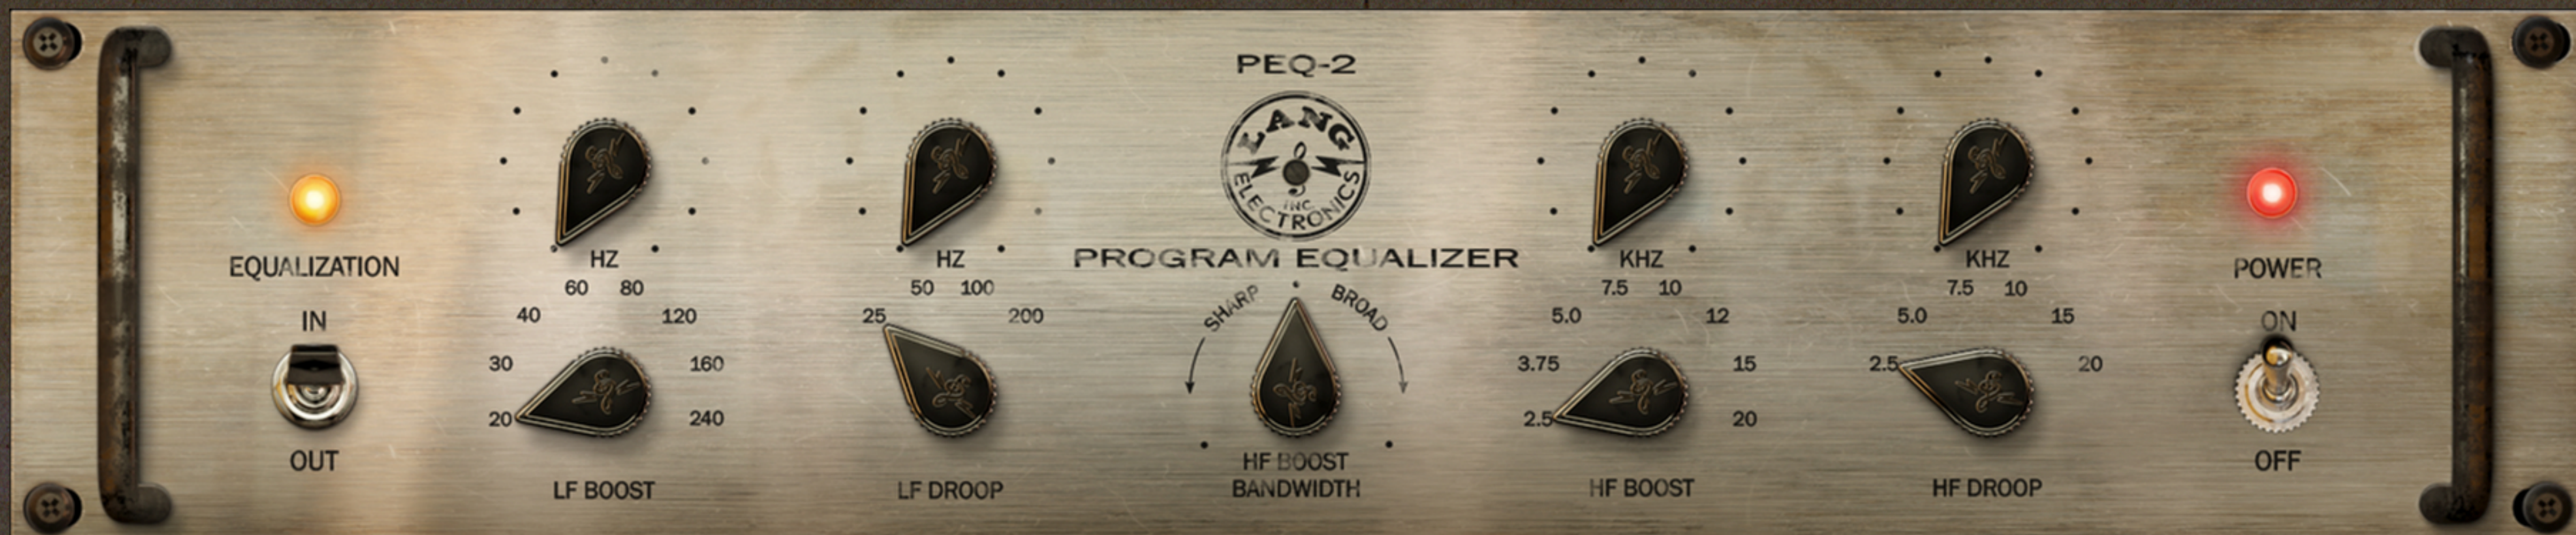
For further information regarding the functioning of the LANG PEQ-2, please refer to the hardware version user manual at:

https://heritageaudio.com/wp-content/uploads/2023/01/LANG-PEQ-2_User-manual.pdf

PEQ-2

PROGRAM EQUALIZER

EQUALIZATION

IN

OUT

HZ
60   80
40   120

30   160
20   240

LF BOOST

HZ
50   100
25   200

LF DROOP

PEQ-2

PROGRAM EQUALIZER

SHARP   BROAD

HF BOOST
BANDWIDTH

KHZ
7.5   10
5.0   12

3.75   15
2.5   20

HF BOOST

KHZ
7.5   10
5.0   15

2.5   20

HF DROOP

POWER

ON

OFF

PLUGIN
USER MANUAL